


Industrial Motherboards for OEM/ODM

ONYX MAX-H310A

Micro-ATX Industrial Motherboard with 8th Generation Intel® Core™ Processor

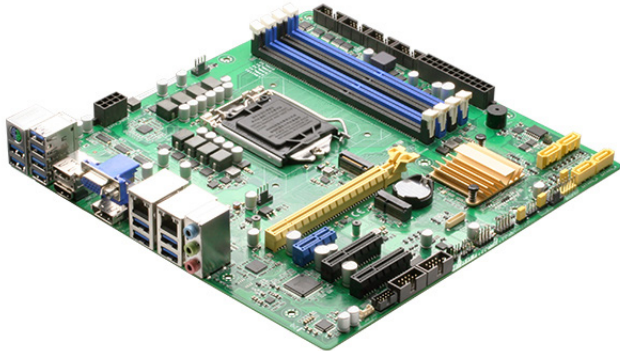

Features

- 8th Generation Intel® Core™ LGA1151 Processor
- Two Independent Displays: HDMI x 1, VGA x 1, DP x 1
- DDR4 2666/2400/2133 MHz, max. 64GB
- Dual Intel® Gigabit Ethernet, i211AT x 1, i219V x 1
- USB 3.2 Gen 1 ports x 4, USB 2.0 ports x 4
- M.2 M-key (PCIe or SATA) x 1, up to 5 SATA III
- TPM Onboard (Optional)



Specifications

System

Processor	8th Generation Intel®(Coffee Lake-S) Core™ i7/ i5 /i3, Pentium 14nm LGA 1151 socket Processor
Chipset	Intel® H310 Express Chipset
Memory	DIMM x 2, DDR4 (2666/2400/2133 MHz, max. 32GB) non-ECC, un-buffered memory Dual-channel memory architecture
I/O Chipset	NCT6793D+ F81216HD
Ethernet	Intel® PHY i219V Gb LAN x 1 Intel® i211AT Gb LAN x 1 RJ45 x 2
Audio	Realtek® ALC887 6-Channel High Definition Audio CODEC
TPM	Nuvoton NPCT650ABBYX TPM2.0 onboard (default: No)
Expansion Slots	PCIe 3.0[x16] Slot x 1, PCIe 2.0[x1] Slot (open edge) x 3 M.2 2280 M-key (BOM option: PCIe or SATA; default: SATA x 1
BIOS	128M bit Flash ROM, AMI BIOS
H/W Monitor	Temperature Monitor on CPU/Chassis, Voltage Monitor on Vcore/5V/3.3V/12V, Fan Monitor on CPU/Chassis
WatchDog Timer	1~255 steps by software program
Smart Fan Control	CPU Fan x 1, Chassis Fan x 2
Wake on LAN/ PXE	Yes (WOL / PXE)
Power State	S3, S4, S5

Graphics

Graphics Chipset	Intel® UHD Graphics
Graphics Multi Display	VGA+DP; VGA+HDMI; DP+HDMI
VGA	Up to 1920 x 1200 @60Hz (via IT6516B)
DVI	—
HDMI	Up to 4096 x 2160 @ 24 Hz / 2560 x 1600 @ 60 Hz, with Digital Audio
Display Port	Up to 4096 x 2160 @ 24 Hz / 3840 x 2160 @ 60 Hz, with Digital Audio
LVDS	—
eDP	—
Backlight Control	—

Environment / Power / ME

Battery	Lithium battery
Power Requirement	24-pin ATX connector x 1, 8-pin (2x4) ATX 12V Power connector x 1
Operation Temp.	32°F ~ 140°F (0°C ~ 60°C)
Storage Temp.	-40°F ~ 185°F (-40°C ~ 85°C)
Operation Humidity	0% ~ 90% RH, non-condensing
Certificate	CE & FCC (Class A)
Form Factor	Micro-ATX, 9.6" x 9.6" (244mm x 244mm)
Weight	1.76 lb (0.8 Kg)
MTBF (Hours)	261,090

Rear Panel I/O Ports

USB	USB 3.2 Gen 1 ports (5 Gbps) x 4, USB 2.0 ports x 4
Display I/O	DP x 1, VGA x 1, HDMI x 1
Audio I/O	Audio Jack x 3: Line-in, Mic-in, Line-out
LAN I/O	LAN (RJ-45) port x 2
Serial Port	—
PS/2 Port	PS/2 Combo Port (Keyboard & Mouse) x 1
Others	—

Internal I/O Connectors

Storage	SATA III (6.0Gb/s) ports (BOM option: additional 2 SATA) x 3 M.2 2280 M-key (BOM option: PCIe1 or SATA; default: SATA) x 1
USB	USB 2.0 header support additional 2 USB ports (2x5PIN, p=2.54mm) x 1
Display I/O	—
Audio I/O	speaker header (Line-out) x 1
Serial Port	RS-232 Boxer headers x 5 RS-232/422/485 Boxer header (COM1, Pin9 supports 5V/12V/RI optional) x 1
PS/2 Port	—
Parallel Port	—
DIO	8-bit Digital I/O interface (In/Out programmable) x 1
FAN	CPU Fan connector(s) (4-pin) x 1, Chassis Fan connector(s) (4-pin) x 2
Power	—
Others	Chassis intrusion x 1 AT/ATX mode select jumper x 1 Front panel header x 1 Clear CMOS jumper x 1 LPC boxer header x 1
OS Support	Windows® 10 64bit, Linux Ubuntu 64bit (18.04.1/Kernel4.8.0)